


BELA-BELA LOCAL MUNICIPALITY

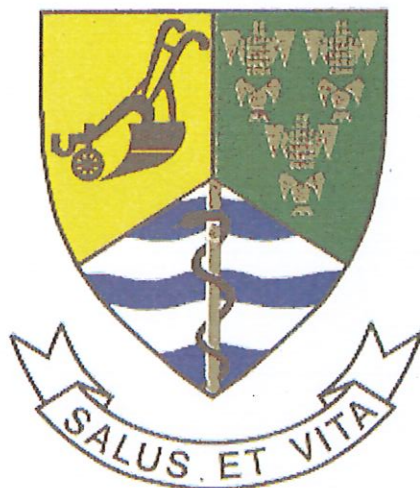

SMALL-SCALE EMBEDDED GENERATION POLICY

OCTOBER 2023

MC79/10/2023

REPORT ON THE SMALL-SCALE EMBEDDED GENERATION (SSEG) POLICY.

RESOLVED

1. **THAT** the Small-Scale Embedded Generation (SSEG) Policy is approved after undergoing public participation for over a period of thirty (30) calendar days.


Cllr K SEPURU
ACTING SPEAKER

Council Meeting Date: 31 October 2023.



Bela-Bela Local Municipality

Tel: (014) 736-8000

Fax: (014) 736-3288 / 736-4837

www.belabela.gov.za

POLICY NAME	SMALL-SCALE EMBEDDED GENERATION POLICY	
POLICY NUMBER	TBC	
DATE	OCTOBER 2023	
STATUS	FINAL	
APPROVED BY	MUNICIPAL MANAGER	
	COUNCIL	
DATE APPROVED	31 OCTOBER 2023	
DATE LAST REVIEWED	N/A	
DATE PUBLISHED	NOVEMBER 2023	

TABLE OF CONTENTS

1. ACRONYMS AND ABBREVIATION	1
2. DEFINITIONS.....	1
3. BACKGROUND.....	2
4. CONSTITUTIONAL, REGULATORY AND POLICY CONTEXT	3
4.1 AMEU / SALGA Standard Documentation	4
5. OBJECTIVES	4
6. EMBEDDED GENERATION DEFINITION.....	4
7. SCOPE OF THE POLICY	5
8. POLICY PRINCIPLES	6
9. MUNICIPAL MANAGER AS RESPONSIBLE AND ACCOUNTABLE OFFICER	7
10. IMPLEMENTATION of SSEG	8
10.1 Application process	8
10.2 Commissioning.....	8
10.3 Metering	8
10.4 Contractual agreements	8
10.5 SSEG Tariffs	8
10.6 Standards.....	9
11. IMPLEMENTATION OF LARGE-SCALE EMBEDDED GENERATION	9
11. EFFECTIVE DATE OF POLICY.....	10
12. REVIEW OF THE POLICY	10
13. ENQUIRIES	10
ANNEXURES.....	11
1. REQUIREMENTS FOR SMALL-SCALE EMBEDDED GENERATION: CONDITIONS AND APPLICATION PROCESS TO BECOME AN EMBEDDED GENERATOR IN BELA-BELA LOCAL MUNICIPALITY	11
2. APPLICATION FOR THE CONNECTION OF EMBEDDED GENERATION.....	11

1. ACRONYMS AND ABBREVIATION

EG	:	Embedded Generation
ESD	:	Electrical Services Department
IRP	:	Integrated Resource Plan
kVA	:	kilo-Volt Ampere (unit of electrical apparent)
kW	:	kilo-Watt (unit of electrical real power)
kWp	:	kilo-Watt peak (the rated peak output of solar PV panels)
MVA	:	Mega-Volt Amperes (1MVA=1000kVA)
MW	:	Mega-Watts (1MW=1000kW)
NERSA	:	National Energy Regulator of South Africa
PV	:	Photovoltaic
SSEG	:	Small Scale Embedded Generation/Generator

2. DEFINITIONS

“Bi-directional meter” A meter that separately measures electricity flow in both directions (import and export). Such a meter displays the balance of the imported and exported electrical flow energy in a single register meter (net metering) or displays both imported and exported electrical flow energy in separate registers.

“Customer” In the context of this document, customers who also generate will be referred to as “customers” although in actual fact they are “customer/generators”.

“Embedded Generator” An entity that operates one or more generation sources connected to the distribution grid directly, or behind the customer’s meter, that include energy conversion device(s), static power converter(s), if applicable and the control and protection gear within a customer’s network that operates in synchronism with the utility’s network.

“Export tariff” A payment for every kilowatt-hour (kWh) of surplus electricity a customer system exports to the electricity grid.

“Import tariff” A payment for every kilowatt-hour (kWh) of electricity imported to a customer from the electricity grid.

“Municipality” Bela-Bela Local Municipality



“Reverse power flow” The flow of energy from the customer electricity installation onto the utility grid as a result of the instantaneous generation exceeding the instantaneous consumption at the generation site in question.

“SSEG” Small Scale Embedded Generation - an embedded generator with a generation capacity of up to 1000kVA (1MVA) (definition further elaborated below).

“Tariff” A combination of charging parameters applied to recover measured quantities such as consumption and capacity costs as well as service costs.

3. BACKGROUND

Steep increases in the price of electricity, elevated environmental awareness, rapidly decreasing costs of photovoltaic (PV) panels, and the high risk of national power blackouts have all resulted in electricity distributors around the country receiving requests to allow electricity customers to connect PV and other Embedded Generators (EGs) to the electricity grid. Such EGs are either directly connected to the distribution grid or are connected to the wiring on the customer's premises which is in turn connected to, and supplied by, the Municipality's electricity network. Such generators are hence all considered to be 'embedded' in the local municipal electricity grid.

The parallel (or embedded) connection of any generator to the electrical grid, however powered, has numerous implications for the local electricity utility. The most significant implications are the safety of the utility staff, the public and the user of the generator. Further implications include the impact on the quality of the local electrical supply, and metering and billing issues. In terms of the Municipal Structures Act, No. 117 of 1998, municipalities are therefore obliged to regulate the installation of EGs to uphold responsible management of the distribution network, as well as for the general benefit and protection of citizens.

Although the electricity distribution industry is highly regulated, EG's have not yet been adequately covered in national policy or legislation. The AMEU and SALGA have developed standardized approaches and documentation to support municipalities in this regard, aligned with national policies and regulation, and this Policy is consistent with the AMEU-SALGA approach and recommendations.

4. CONSTITUTIONAL, REGULATORY AND POLICY CONTEXT


Section 156 (1) and Schedules 4B and 5B of the Constitution assign municipalities authority and administration over 'Electricity and gas reticulation'. The municipality has legislative and executive authority in this area, and thus must develop a regulatory environment which ensures the safe and proper functioning of their electricity grid in terms of the Municipal Structures Act, No. 117 of 1998. This environment must not contradict the national regulatory framework. Since embedded generators are connected to, and impact on the local distribution grid, municipalities must develop an appropriate regulatory framework for such generators. The electricity reticulation function extends to providing open and non-discriminatory access to the municipal distribution system and to permit the connection of embedded generation systems¹.

Section 74 of the Municipal Systems Act requires the municipality to set appropriate tariffs for municipal services. The use of the municipal distribution grid by embedded generators therefore requires that the municipality sets a suitable tariff for such generators.

The National Energy Regulatory of South Africa issues electricity generation licenses in terms of the Electricity Regulation Act. Schedule 2 of this act specifies system sizes that must be registered with NERSA, and those that must be licensed by NERSA (as of July 2022 systems between 100kW and 100MW must be registered with NERSA, and systems over 100MW capacity require licensing, although this Schedule is revised regularly). This also applies to embedded generators.

Technical specifications and standards have been developed to guide the implementation of embedded generation such that safety, power quality, and grid operational parameters are not negatively impacted, centering around the Grid Code, NRS097-2 series of specifications (for small-scale generators), and the SANS 10142-1-2: *The wiring of premises; Specific requirements for embedded generation installations connected to the low voltage distribution Network in South Africa* (as published and amended).

¹ Paragraph 4 of the Distribution Code sets out the responsibilities of distributors and stipulates in paragraph 4(1) that the distributor shall make capacity available on its networks and provide open and non-discriminatory access for the use of this capacity to all customers including embedded generators.

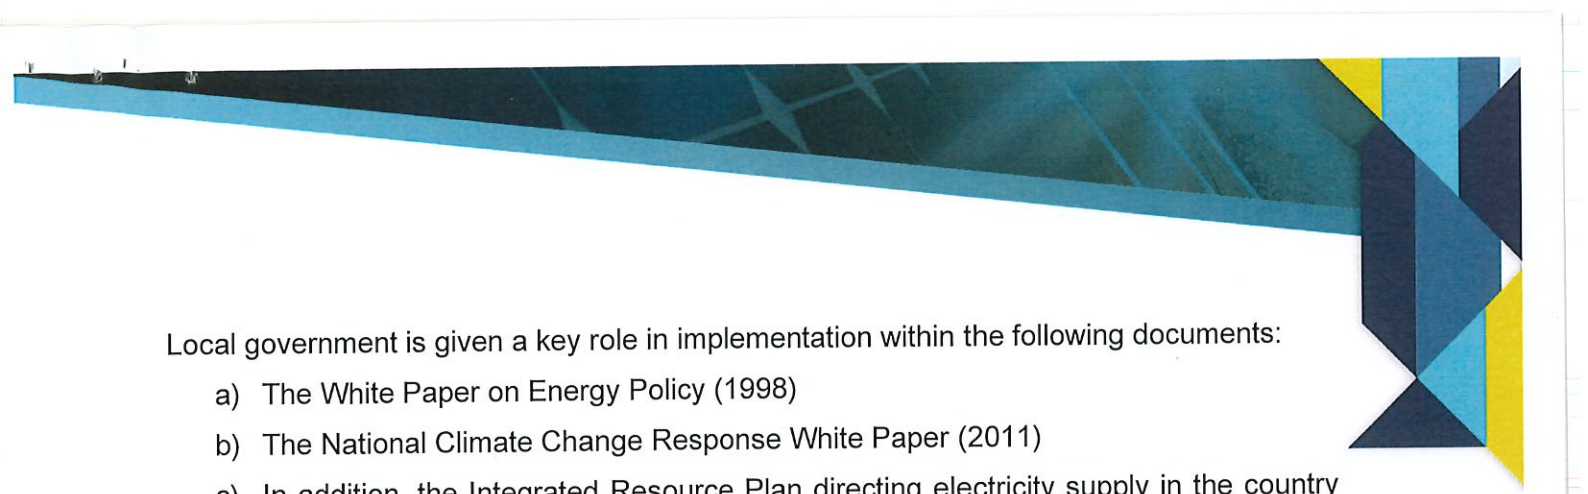

Local government is given a key role in implementation within the following documents:

- a) The White Paper on Energy Policy (1998)
- b) The National Climate Change Response White Paper (2011)
- c) In addition, the Integrated Resource Plan directing electricity supply in the country increasingly recognizes the role of local government and of embedded generation.

In addition to the above obligations, local government should align with:

- d) White Paper on the Promotion of Renewable Energy and Clean Energy Development (2003)
- e) The transition to a green economy
- f) National carbon mitigation intentions

4.1 AMEU / SALGA Standard Documentation

The Association of Municipal Electricity Utilities (AMEU) and the South African Local Government Association (SALGA) have endorsed a set of Standard documents which provide a sound approach for engaging with EG by municipalities. The focus is on Small Scale Embedded Generators, but guidance is also given on larger embedded generators. The documents have been reviewed by a municipal SSEG Working Group, and provide a framework to facilitate the establishment of systems to process and integrate SSEG into municipal operations. This Policy is in accord with this SALGA-AMEU framework.

5. OBJECTIVES

This policy facilitates the inclusion of Embedded Generation (EG) onto the electricity distribution network of Bela-Bela Local Municipality, so that safety, power quality, grid operation and municipal revenue issues are adequately addressed, and that the local renewable energy industry and green economy is promoted at the same time, supporting job creation.


6. EMBEDDED GENERATION DEFINITION

- 6.1 An Embedded Generator is any generator, such as solar PV, wind, hydro or diesel, which is connected to the distribution network, either directly, or behind the customer's meter – in which case it is 'embedded' because it is connected to the customer's wiring which is in turn connected to the distribution network.

- 
- 6.2 **Small-scale embedded generation (SSEG)** refers to an embedded generator with maximum power generation up to 1MVA/MW peak output capacity, such as PV systems or small wind turbines which are located on residential, commercial or industrial sites where electricity is also consumed. SSEG is in contrast to large-scale wind farms and solar parks that generate large amounts of power, typically in the multi-MW range. Most of the electricity generated by an SSEG is consumed directly at the site but times arise when generation exceeds consumption and power is allowed to flow in reverse - from the customer onto the utility grid.


7. SCOPE OF THE POLICY

- 7.1 This policy document provides a framework for the approval and registration of Embedded Generators of electricity as well as the regulation thereof relative to the requirements of the Municipality and all other Policies, By-laws and Legislation applicable thereto.
- 7.2 The policy is applicable to all customers wishing to install systems categorised as Embedded Generators.
- 7.3 The policy focuses on SSEG. However, larger EG are also included, but detailed guidance in other documentation (as published) must be referred to.
- 7.4 The policy covers the following for SSEG:
- a) The conditions under which SSEG will be accepted onto the Municipal distribution network
 - b) The Application and Commissioning process
 - c) Contractual arrangements between the SSEG customer and the Municipality
 - d) Metering and tariffs for SSEG
 - e) The policy covers all prospective EG customers in the municipal distribution area connected to the municipal distribution network.
- 7.5 Wheeling of power across the municipal network is excluded from this policy. Other policies (as published) should be referred to in such cases.

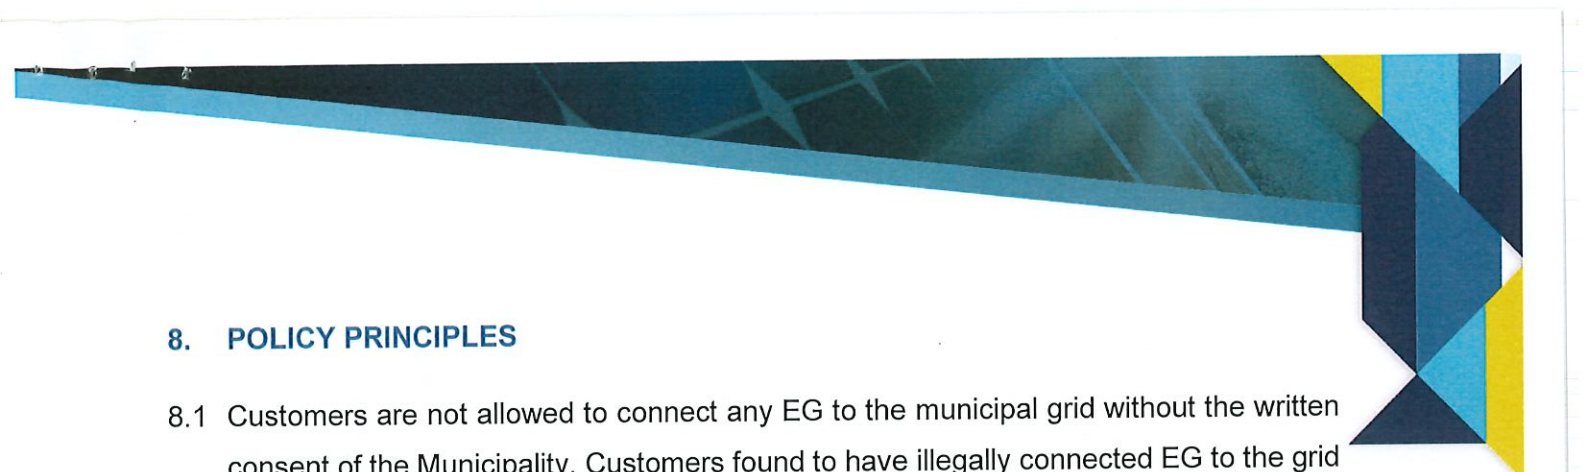


8. POLICY PRINCIPLES

- 8.1 Customers are not allowed to connect any EG to the municipal grid without the written consent of the Municipality. Customers found to have illegally connected EG to the grid (either before or after their electricity meter) will be instructed to have the installation disconnected from the grid. Should the customer fail to have the EG disconnected from the grid, the Electricity department reserves the right to disconnect the electricity supply as stipulated within the Electricity By-laws.
- 8.2 The document '*REQUIREMENTS FOR EMBEDDED GENERATION: Conditions and application process to become an embedded generator in Bela-Bela Local Municipality*' (hereinafter 'REQUIREMENTS document') specifies technical, procedural and other conditions and parameters that must be adhered to. The latest version of this 'REQUIREMENTS' document must be consulted, and adherence to the provisions therein complied with.
- 8.3 Customers who wish to connect SSEG to the municipal grid are required to follow the application procedure as detailed in the REQUIREMENTS document.
- 8.4 Customers or developers wishing to install larger generators than 1MVA must engage the municipality to establish the standards, specifications and processes that need to be complied with. Such larger generators fall under conditions and requirements that differ from SSEG.
- 8.5 Any existing EG systems or applications submitted prior to the adoption of this Policy will have to demonstrate compliance with this Policy through following the procedures specified herein.
- 8.6 Existing legislation specifies system sizes that need to register with NERSA, and those that require a license from NERSA. As of July 2022, systems over 100kW require NERSA registration, and those over 100MW require a NERSA license, although such requirements change periodically. Anyone wanting to connect systems within the specified ranges must produce the necessary registration or generating license, or exemption letter from NERSA before they will be given permission to connect their generators to the municipal grid. Should this legislation change, SSEG customers will be required to comply with the new regulations at their own cost.

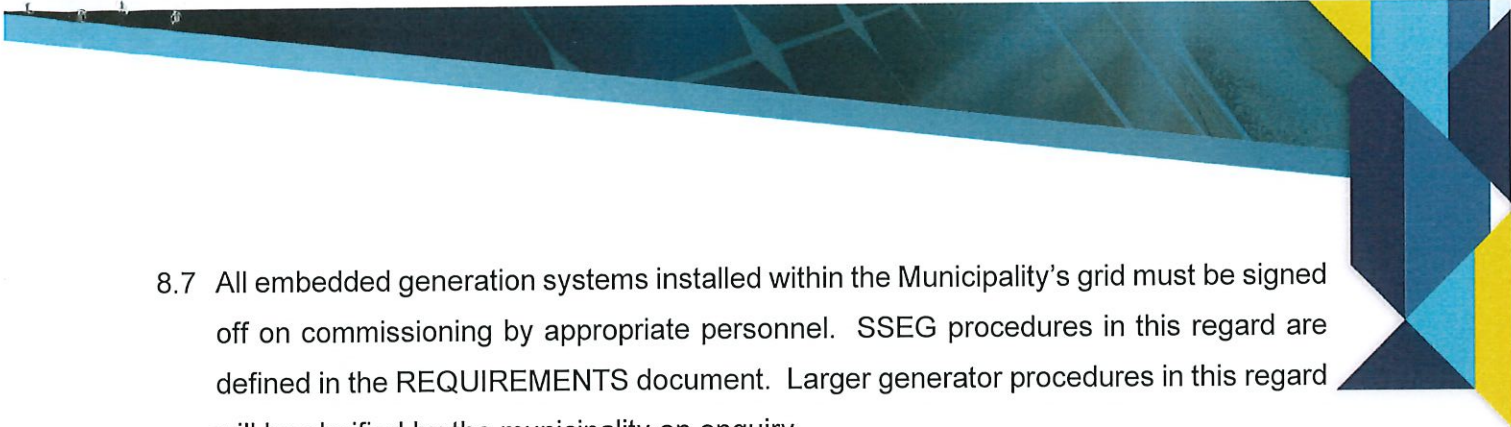- 
- 8.7 All embedded generation systems installed within the Municipality's grid must be signed off on commissioning by appropriate personnel. SSEG procedures in this regard are defined in the REQUIREMENTS document. Larger generator procedures in this regard will be clarified by the municipality on enquiry.

9. MUNICIPAL MANAGER AS RESPONSIBLE AND ACCOUNTABLE OFFICER

- 9.1 The Municipal Manager is responsible and accountable for the implementation and enforcement of the provisions of this Policy and must take the necessary steps to do so.
- 9.2 The Municipal Manager shall from time to time report to the Mayor on matters relating to this Policy, the efficacy of the tariffs set by the Council in terms hereof, the administrative mechanisms, resources, processes and procedures related to its implementation and the extent to which the Policy is achieving the objectives of the Council.
- 9.3 All the necessary power and authority is hereby delegated to the Municipal Manager to enable him/her to fulfil his/her functions, responsibilities and obligations in terms hereof, including appropriate revisions of the REQUIREMENTS document or other relevant documents to keep up to date with this fast-changing field, with full authority to further delegate any specific responsibility.

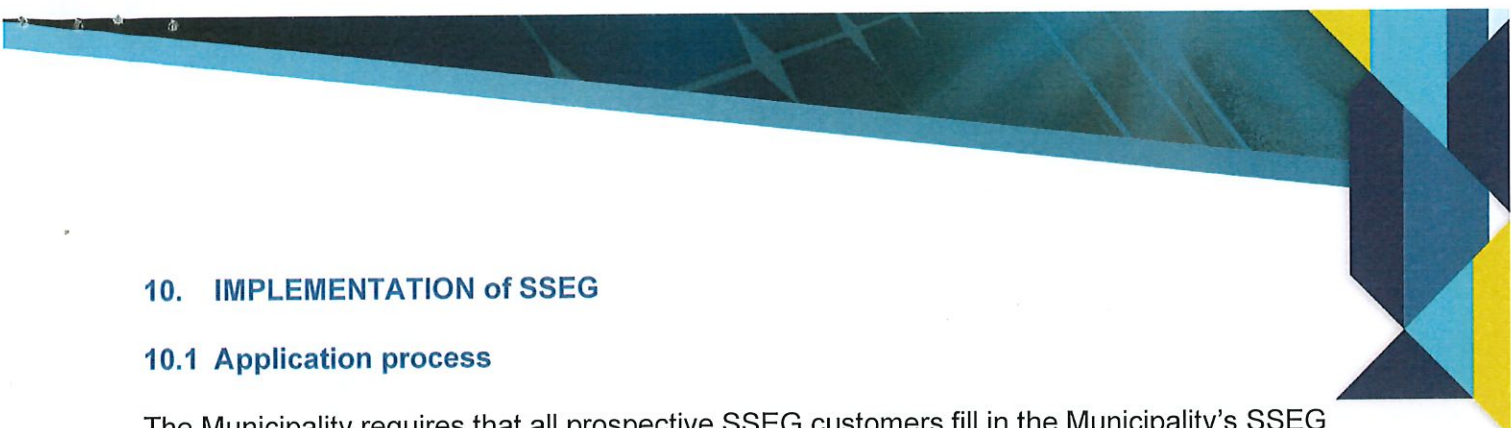

10. IMPLEMENTATION of SSEG

10.1 Application process

The Municipality requires that all prospective SSEG customers fill in the Municipality's SSEG application form and submit it to the relevant office for assessment. The Municipality will evaluate the application according to criteria in the NRS097-2-3 and other criteria as noted in the REQUIREMENTS document, and inform the applicant of the success or otherwise of the application. Should the application not be successful, the Municipality will advise the applicant regarding necessary measures to enable compliance with the criteria and SSEG connection. Further information or technical studies may be requested by the Municipality before a conclusion can be reached.

10.2 Commissioning

Approved SSEG systems, once installed, must be commissioned and signed off by suitable personnel as specified in the REQUIREMENTS document. A Commissioning Report must be provided to the Municipality on the prescribed form.

10.3 Metering

All SSEG systems must have approved bi-directional meters installed, as clarified in the "REQUIREMENTS" document.

10.4 Contractual agreements

All new SSEG customers must agree to the Municipality's **"GENERAL TERMS AND CONDITIONS: CONTRACT FOR CONNECTION OF AN EMBEDDED GENERATOR"** before generation may commence. This contract clarifies the legal responsibilities of both the customer and the Municipality.

10.5 SSEG Tariffs

The Municipality aims to implement SSEG tariffs which both cover municipal costs (fixed and variable) in different tariff categories, and will also be cognizant of a reasonable return-on-investment for the SSEG customer. The tariff will be implemented only once NERSA has approved such a tariff. Prior to such tariff implementation, reverse feed-in to the Municipal grid will be permitted, but no financial compensation will be given.



10.6 Standards

All SSEGs are to comply with the following standards:

- a) NRS 097-2-1: *Grid interconnection of embedded generation: Part 2 Small Scale Embedded Generation, Section 1: Utility interface*
- b) NRS 097-2-3: *Grid interconnection of embedded generation: Part 2 Small Scale Embedded Generation, Section 3: Simplified utility connection criteria for low voltage connected generators*

In addition, SSEG installations are to comply with the following standards, legislation and regulations:


- c) *South African Renewable Power Plant Grid Code (although the NRS 097-2 series cover most issues relevant to SSEG)*

11. IMPLEMENTATION OF LARGE-SCALE EMBEDDED GENERATION

11.1 Generators larger than 1MVA need to follow processes different to that of SSEG, as various standards, codes and procedures relevant to these generators need to be adhered to, including Grid Code compliance and other impact assessments. The **GUIDE FOR PROCESSING GENERATOR APPLICATIONS OVER 1MW** (as published and amended) is relevant in such circumstances. Prospective generators falling into this category need to approach the municipality for guide documentation and conditions applicable to them.

- a) NRS 048: Electricity Supply – Quality of Supply
- b) SANS 10142-1, including SANS 10142-1-2: The wiring of premises (as amended and published)
- c) SANS 474 / NRS 057 : Code of Practice for Electricity Metering
- d) Municipality Electricity Supply by-law

NOTE: The “**REQUIREMENTS**” document has specific information regarding compliance with the above standards or specifications.

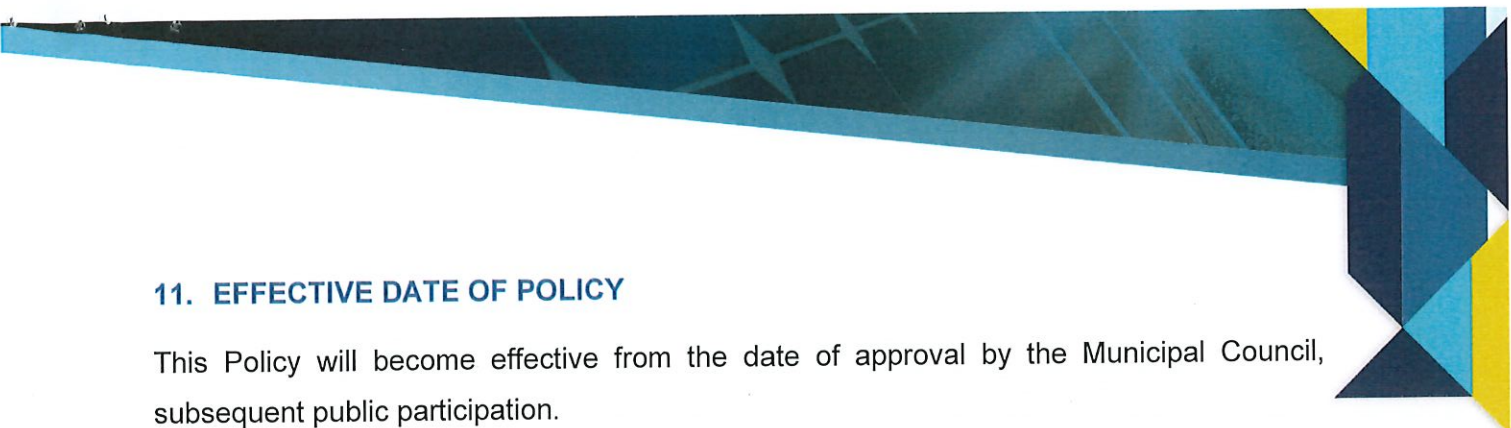

11. EFFECTIVE DATE OF POLICY

This Policy will become effective from the date of approval by the Municipal Council, subsequent public participation.


Tariffs contemplated within this Policy will be formulated as part of the annual budget approval process, and will become effective pursuant to the dates stipulated therein. Tariffs are subject to NERSA approval.

12. REVIEW OF THE POLICY

The policy should be reviewed as and when necessary.

13. ENQUIRIES

All enquiries related to the content of this policy should be directed to the Divisional Manager: Electrical.

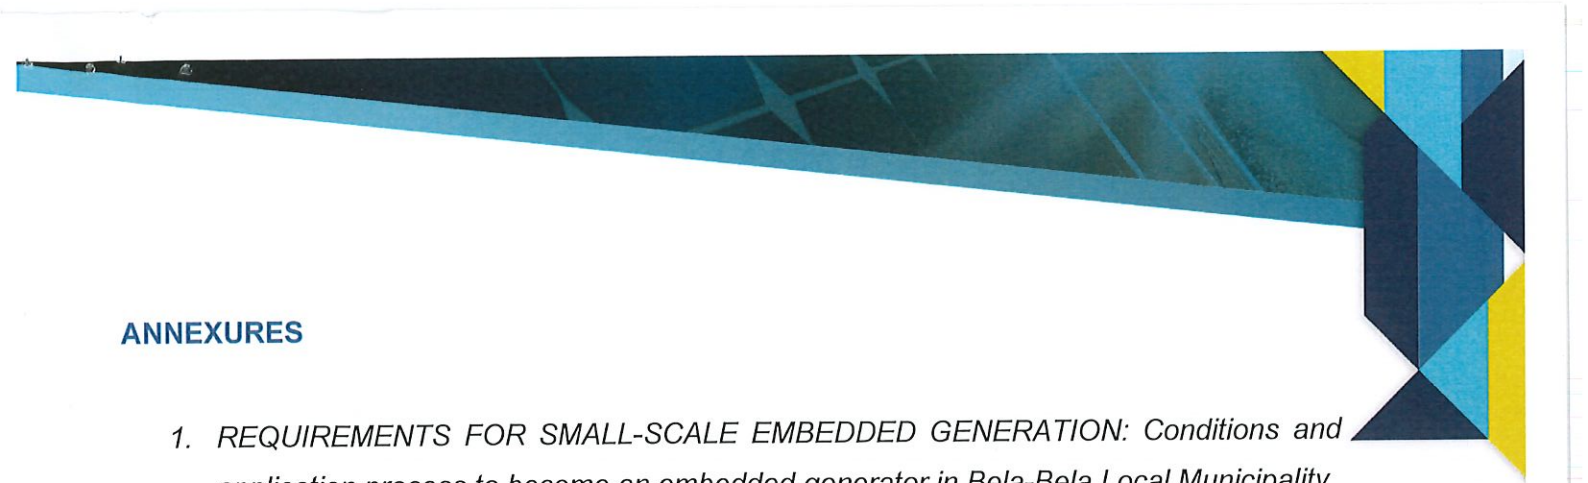

ANNEXURES

1. *REQUIREMENTS FOR SMALL-SCALE EMBEDDED GENERATION: Conditions and application process to become an embedded generator in Bela-Bela Local Municipality*
 2. APPLICATION FOR THE CONNECTION OF EMBEDDED GENERATION
-



REQUIREMENTS FOR EMBEDDED GENERATION

Conditions and application process to become a small-scale embedded generator in Bela-Bela Local Municipality

August 2022

Contents

i. Information on this document	5
ii. Glossary & Definitions	7
iii. Abbreviations	9
1. Introduction	10
1.1. Connecting larger generators to the distribution grid	10
2. Indemnity, Legal Requirements & Curtailment	11
2.1. Legal and Illegal Connections to the municipal electrical network	11
2.2. Generation Curtailment	11
2.3. Right to adapt rules & regulations	11
2.4. Right to deny access	11
2.5. Unsuccessful applications	12
2.6. Contract with the municipality	12
2.7. Transfer/change of ownership	12
3. General Guidelines - Small Scale Embedded Generators	13
3.1. Registration or Generation licence	13
3.2. Self-consumption vs IPPs (pure generators)	13
3.3. Exporting electricity	13
3.4. Wheeling	14
3.5. Applicable technical standards	14
3.6. Testing of Inverters	14
3.7. Islanding / Anti-Islanding installations	15
3.8. Battery or other Storage	15
3.9. Hybrid inverters operating in islanded (off-grid) mode	15
3.10. Fire safety and emergency shut-off switch	15
3.11. Dead Grid safety Lock	15
3.12. Qualified installers	16
3.13. SSEG Sign-off on Commissioning	16
3.14. Decommission of SSEG system	16
3.15. Eskom grid connection	16
3.16. SSEG applications from sub-tenants, complex residents or other non-municipal customers	16
3.17. Off-grid system	16
3.18. Advice for the customer	16
3.18.1. Load profile management to maximise benefit to the customer	16
3.18.2. Roof strength for PV installations	18
3.18.3. Installer experience and accreditation	18
4. Metering	19
4.1. Metering installation and reverse power flow/ feed-in to the municipal electrical network	19
All customers installing SSEG, whether with reverse feed blocking or not, shall have an approved bi-directional meter. The Municipality shall provide and install the requisite meter at the customer's cost.	
4.2. Adaption of electrical metering installation	19
4.3. Refunds of electricity already pre-purchased	19
5. SSEG connection criteria	20

5.1.	Shared LV feeders	20
5.2.	Phase balancing	21
5.3.	Dedicated LV feeders	21
5.4.	Cumulative SSEG capacity and impact on LV and MV networks	21
5.5.	Grid impact studies	21
6.	SSEG Tariffs	21
6.1.	Residential SSEG Tariff	22
6.2.	Commercial and Industrial SSEG Tariff	22
6.3.	Billing Period	22
6.4.	Connection Costs	22
6.5.	Increased Costs	22
6.6.	Time-of-Use Tariffs	22
7.	Approvals required from other municipal departments	23
7.1.	Buildings/Planning department	23
7.2.	Other Approvals	23
8.	What payments may be due by the customer?	23
9.	SSEG application process	23
10.	Changes to existing approved systems	25
11.	ANNEX A: Grid Impact Study Overview	26
o	General grid impact studies	26
o	Requirements for more complex Grid Impact Studies	26
o	Grid Impact Study Specification Guide	27
12.	ANNEX B: New Owner/Account Holder Declaration	28

Disclaimer and Indemnity

The information contained in this document is for information purposes only and to guide stakeholders regarding the requirements and application process of Bela-Bela Local Municipality in connecting embedded generation to the municipal electricity network. The opinions expressed are in good faith and while every care has been taken in preparing this document, and the authors make no representations and give no warranties of whatever nature in respect of these documents, including but not limited to the accuracy or completeness of any information, facts and/or opinions contained therein.



Acknowledgements



SALGA facilitated and contributed to the development of the standard AMEU documentation



Sustainable Energy Africa contributed to and compiled the standard AMEU documentation



This document was informed by the GreenCape SSEG guideline for Western Cape municipalities



The development of the document was funded by GIZ's support programme for renewable energy in South Africa



AMEU Working Group on standardised SSEG documentation:



Johannesburg – City Power



Tshwane



eThekweni



Nelson Mandela Bay
Metropolitan Municipality



Buffalo City



Mangaung - Centlec



Cape Town



Ekurhuleni

Contact details:

AMEU: 011 061 5000

SALGA: 012 369 8000


i. Information on this document

Purpose of the document	This document primarily sets out the requirements and application process of the Municipality in connecting all forms of Embedded Generation (EG) to the municipal electricity network. The focus is on Small-Scale Embedded Generation (SSEG), but guidance is also provided for the connection of larger generators.
Defining small scale embedded generation	Small-scale embedded generation (SSEG) refers to power generation installations less than or equal to 1MVA/1000kVA which are typically located on residential, commercial or industrial sites, and generated power is mainly for self-consumption . SSEG is in contrast to large-scale generation units that generate large amounts of power, typically in the multi-Megawatt range, and are often pure generators (not for self-consumption)
The need for this document	The parallel connection of any generator to the municipal electrical network, however powered, has numerous implications for the Municipality. It therefore needs to be regulated and managed. This document serves to: • Ensure the safety of the municipal staff, the public and the user of the SSEG installation. • Uphold the power quality of the municipal electricity network • Clarify metering and billing requirements and options In addition, municipalities are faced with low carbon development imperatives and economic growth challenges. SSEG can play a role in both of these areas, and the document therefore also serves to: • Promote the development of the SSEG industry by creating a conducive environment for growth.
Scope	This document covers: • The connection SSEG installations to the municipal electrical network • Installations up to 1MVA (although different conditions apply above or below 350kVA – see later) • Installations connected to low voltage networks • Installations mainly for self-consumption This document does not provide detail on: • Systems with a generation capacity above 1MVA (anyone wanting to connect a SSEG system greater than 1MVA should engage with the municipality to determine their requirements before commencing with any application). • Wheeling of electricity • The connection of SSEG to the Eskom electrical grid. • Systems connecting to MV and HV networks (although the NRS 097-1 standards covering MV and HV connections are not complete, such systems may be approved by the Municipality, but are likely to require further grid studies and should be discussed separately with the municipality) • Pure generators (with no self-consumption)

Who this document is for

This document will assist all relevant stakeholders involved in the commissioning, installation, management and ownership of an SSEG system, with generation capacity less than or equal to 1 MVA (1000 kVA), including:

- SSEG project developers
- Residential and commercial property owners
- SSEG installers
- Energy consultants commissioned to design SSEG systems
- Municipal officials involved in SSEG generation
- Registered technical personnel who are involved in SSEG commissioning

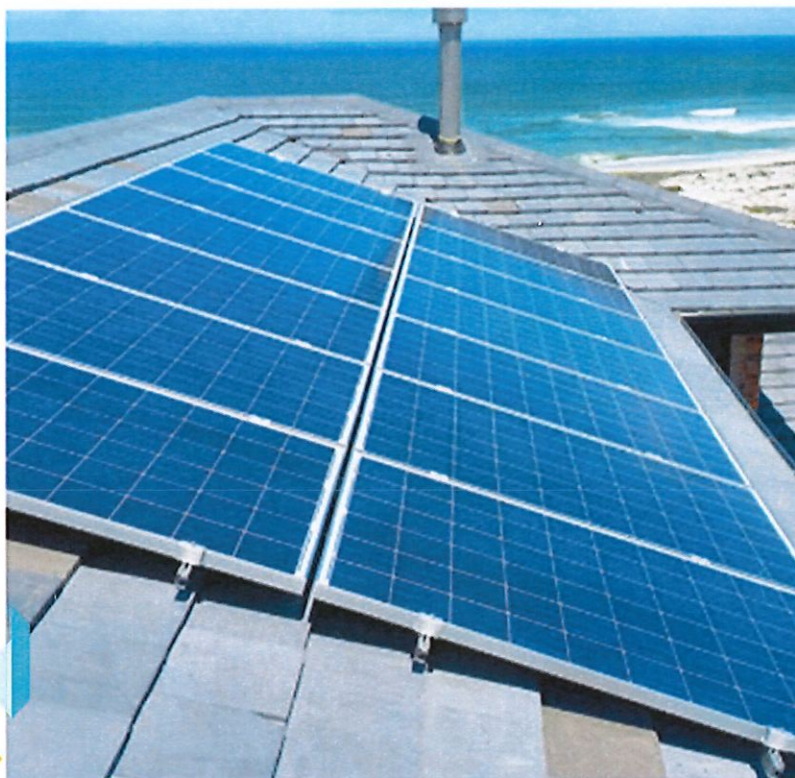

ii. Glossary & Definitions

Alternating current	The flow of electrical energy that follows a sine wave and changes direction at a fixed frequency (i.e. it 'alternates'). Most residential and commercial uses of electricity require alternating current.
Direct current	The flow of electrical energy in one constant direction. Direct current is typically converted to alternating current for practical purposes as most modern uses of electricity require alternating current.
Anti-Islanding	The ability of an SSEG installation to instantly and automatically disconnect the SSEG installation from the municipal electrical network whenever there is a power outage in the municipal electrical network, thus preventing the export of electricity to the municipal electrical network from the SSEG installation. This is done primarily to protect municipal electrical network workers who may be working on the electrical network and who may be unaware that the electrical network is still being energized by the SSEG.
Bi-directional meter	A meter that separately measures electricity flow in both directions (import and export)
Customer	In the context of this document, customers who also generate shall be referred to as "customers", although in effect they are generators.
Embedded generator	A generator connected to the municipal distribution network. These are typically on a customer's property and behind their meter.
Generating capacity	The maximum amount of electricity, measured in kilovolt Amperes (kVA), which can flow out of the generation equipment into the customer's alternating current wiring system. This is therefore the maximum alternating current power flow which can be generated by the system in its current configuration.
Grid-tied	An SSEG installation that is connected to the municipal electrical network either directly or through a customer's internal wiring is said to be "grid-tied". The export of energy onto the municipal electrical network is possible when generation exceeds the customer's consumption at any point in time.
Hybrid grid-tied system	A generation configuration, typically solar PV, which includes battery storage and where the system can operate in grid-tied mode as well as independently of the grid – for example during loadshedding.
Inverter	A power device that converts direct current to alternating current at a voltage and frequency which enables the SSEG installation to be connected to the municipal electrical network.

Isolated	A section of an municipal electrical network which is disconnected from all other possible sources of electrical potential is said to be isolated
Load profile	The profile or curve showing the variation of the customer's rate of electricity consumption (or demand) over time.
Low-voltage	Voltage levels up to and including 1 kV (1kV= 1000 Volts)
Medium-voltage	Voltage levels greater than 1 kV up to and including 35 kV.
Pr Eng or Pr Tech Eng or Pr Techni Eng	This refers to a professional engineer, professional technologist or professional engineering technician who is registered with the Engineering Council of South Africa (ECSA).
Reverse power flow	The flow of energy from the customer electricity installation onto the municipal electrical network (i.e. export) as a result of the instantaneous generation exceeding the instantaneous consumption at the generation site in question.
SSEG Connection Contract	The terms and conditions governing the connection of the SSEG installation to the municipal electrical network accepted by the customer
Small Scale embedded generator or SSEG	A small-scale embedded generator for the purposes of these guidelines is an embedded generator with a generation capacity of less than or equal to 1000 kVA (1MVA).
Stand-alone generator/ off-grid generator	A generator that is not in any way connected to the municipal electrical network. Export of energy onto the municipal electrical network by the generator is therefore not possible.



iii. Abbreviations

AC	Alternating current
AMI	Advanced Metering Infrastructure
DC	Direct current
ECSA	Engineering Council of South Africa
EG	Embedded Generation/Generator
HV	High Voltage
kVA	kilo-Volt Ampere (unit of apparent electrical power, often similar in magnitude to kW)
kW	kilo-Watt (unit of electrical power)
kWp	kilo-Watt peak (the rated peak output of solar PV panels)
LV	Low Voltage
MFMA	Municipal Finance Management Act
MV	Medium Voltage
MVA	Mega-Volt Amperes (1000 kVA)
MW	Mega-Watt (1000 kW)
NERSA	National Energy Regulator of South Africa
NMD	Notified Maximum Demand
PV	Photovoltaic
SSEG	Small Scale Embedded Generation/Generator
VAT	Value Added Tax



1. Introduction

Due to increases in the price of electricity from the national grid and a steady decline in the price of decentralised generation options such as solar PV small-scale embedded generation (e.g. 'rooftop' type systems), decentralised generators are becoming financially more attractive in South Africa. Increasingly such systems are being installed by businesses and residences. It is therefore important that approval procedures and standards are established by municipal distributors to regularise this fast changing situation.

Municipal distributors are legally obliged to ensure that distribution grid power quality is maintained and safety standards are upheld to protect municipal staff working on the network, to protect the public in general, and to protect municipal infrastructure. Also, the potential revenue impact of accelerating EG installations needs to be managed. This requires that specific EG tariffs are introduced.

Municipalities are obliged to provide open and non-discriminatory access to embedded generators according to the Distribution Code, and also are moving to embrace low-carbon energy and green economic growth opportunities. Municipalities play a vital role in facilitating the growth of the EG market. A user-friendly framework around installation application and approval is important in this regard. Such a framework will also minimise systems being installed without permission, thereby potentially not meeting required safety and quality standards.

This document outlines the municipal requirements and processes for prospective EG installations to connect to the municipal electrical network such that the above factors are balanced. The focus is on SSEG, although broad guidance is provided for larger generators.

1.1. Connecting larger generators to the distribution grid

This document covers small-scale embedded generators, with a detailed focus on generators falling under the simplified connection criteria assessment method (see Table 1). Larger generators typically require Grid Impact and/or Grid Code compliance assessments.

Table 1: Summary of connection assessment requirements for small- and large-scale generators

Generator characteristics			Connection assessment method	
Scale	Size	LV or MV connected generator	Simplified criteria (NRS097-2-3)	Grid studies
Small-scale (up to 1MVA)	0-350kVA	LV connected	✓	✗ (if complies with NRS097-2-3)
		MV connected	✗	✓
	350kVA-1MVA	LV or MV	✗	✓
Large-scale (>1MVA)	>1MVA	LV or MV	✗	✓

Large generators and others requiring further grid studies, including all Independent Power Producers (IPPs), should obtain guidance from the municipality, such as:

- Guidelines for Processing Applications for Generators >1MW
- Grid Impact Study Specification Guide

Generic versions of the above guidance documentation is available at www.sseg.org.za.

2. Indemnity, Legal Requirements & Curtailment

2.1. Legal and Illegal Connections to the municipal electrical network

Customers wishing to connect SSEGs to the municipal electrical network are required to follow the normal application procedure as detailed in this document and comply with the regulations, specifications and standards listed herein.

The Municipality's Electricity Supply By-Law (as promulgated) and national regulations state that no electrical generation equipment may be connected to the municipal electrical network without the express consent of the Municipal Electricity Distributor.

Failure to obtain this consent constitutes an offence which could lead to a fine and/or imprisonment. Furthermore, the installation may also be in contravention of the Occupational Health and Safety Act (1993), for which punitive sanctions also apply.

Customers found to have illegally connected an SSEG installation to the municipal electrical network (either before or after their electricity meter) shall be instructed to have the installation disconnected from the municipal electrical network. Should the customer fail to have the SSEG disconnected from the municipal electrical network, the Municipality will disconnect the electricity supply to the property.

In cases where unauthorised reverse feed-in takes place which results in the meter reversing to the benefit of the customer, the municipality may institute action to recover lost revenue and relevant punitive fines will be applicable.

No exemption from any of the Municipality's requirements shall be granted for "retrospective applications".

2.2. Generation Curtailment

In the event of operating conditions resulting in municipal electrical network parameters not meeting statutory minimum quality-of-supply standards it may become necessary to impose peak generation limits on embedded generator installations. It is expected that these limitations would be of a temporary nature, applied only during abnormal system conditions or low load periods.

2.3. Right to adapt rules & regulations

In the event of provincial or national legislative changes to the regulatory environment, or other technical developments, it may become necessary to implement changes to the municipal requirements which SSEGs are to comply with. The Municipality will take into account the implications for existing customers of such changes, and will require these only where grid safety or other important criteria are potentially compromised. All SSEGs, new and existing, will be obliged to comply with such changes, and will do so at their own cost.

2.4. Right to deny access

On receipt of a complete application for an SSEG installation, the Municipality needs to check that, amongst other considerations, the SSEG installation can be accommodated on the municipal electrical network and that the total SSEG capacity of the municipal electrical network has not been exceeded, considering parameters in the NRS097-2-3 and other applicable standards. Equipment should not be purchased prior to obtaining written approval from the Municipality to commence, as approval of the SSEG as proposed by the applicant is not guaranteed and the Municipality shall not be held liable for equipment expenses in such cases.

2.5. Unsuccessful applications

Where proposed SSEG systems are not approved by the Municipality, the Municipality will provide information to the customer on amendments to the proposed system required, and/or advise on conditions to be met, for it to be acceptable to the Municipality.

2.6. Contract with the municipality

All SSEG customers are required to enter into an SSEG contract with the municipality. The document *General Terms and Conditions: Contract for Connection of an Embedded Generator* is available on the municipal website or from municipal electricity department offices. In signing the SSEG Application Form, the customer agrees to be bound by the terms and conditions in this document.

2.7. Transfer/change of ownership

If a transfer of the property and/or change of ownership of the electricity accountholder takes place, the new owner needs to sign the declaration in Annex B, which must be submitted to the electricity department.

Alternatively the SSEG installation shall be decommissioned as set out in paragraph 3.12.

3. General Guidelines - Small Scale Embedded Generators

This section covers important considerations in terms of the Municipality's SSEG rules and regulations that apply to all customers, including residential, commercial and industrial customers, who wish to connect an SSEG system.

3.1. Registration or Generation licence

In terms of the Electricity Regulation Act (2006), any person that owns or operates a generation facility is required to obtain a generation licence to be issued by NERSA unless otherwise exempt as per Schedule 2 in the Act. NERSA has different requirements for different system sizes, as per Table 2.

Table 2: NERSA Requirements for different size systems (August 2021 revision of ERA Schedule 2)

System size	NERSA requirements
0-100kVA	No registration or license necessary
101kVA – 100MW	NERSA registration necessary
>100MW	NERSA license necessary

If a generation licence is required in terms of the Electricity Regulation Act (2006), or registration is required, then it is the customer's responsibility to interact with NERSA in this regard. The Municipality is obliged to report to NERSA on a regular basis regarding all municipal electrical network connected generation and it is also obliged to disconnect generators that are not adhering to regulations.

3.2. Self-consumption vs IPPs (pure generators)

This document focuses on embedded generators which are largely for self-consumption. Independent Power Producers (IPPs) or 'pure generators' (where there is no self-consumption) generally fall under different technical standards in terms of the Grid Code, and financial conditions in terms of the MFMA (competitive procurement process).

3.3. Exporting electricity

Municipal requirements regarding embedded generators exporting power back onto the network are as follows:

There is no technical limit to exporting electricity, but the export credit Rand amount may not result in a net payment to the customer in the energy account (i.e. excluding fixed, demand charges). The customer is advised to size their system appropriately.

NOTE: in terms of the MFMA, the export credit Rand amount granted to the customer may not be greater than the Rand amount for kWh purchased by the customer over a municipal financial year. Any exports above such limit will not be credited to the customer or will be deducted on year-end reconciliation.

3.4. Wheeling

All generators wishing to connect to the municipal network must obtain permission to connect as described in this document, whether wheeling or not. For generators wishing to wheel electricity, the municipality should be approached regarding whether a process for this is in place, and contractual and other arrangements to be complied with.

Generators may not fall under both embedded generator export tariffs and wheeling financial arrangements.

3.5. Applicable technical standards

Most of the technical requirements that SSEGs are required to comply with are covered in the following standards and specifications:

1. NRS 097-2 series: Grid interconnection of embedded generation: Part 2 Small Scale Embedded Generators, in particular:
 - a. *NRS097-2-1: Utility interface*
 - b. *NRS097-2-3: Simplified utility connection criteria for low-voltage connected generators*

In addition, SSEG installations are to comply with the following standards, legislation and regulations:

1. South African Renewable Power Plant Grid Code (although the NRS 097-2 series cover most issues relevant to SSEG)
2. NRS 048: Electricity Supply – Quality of Supply
3. SANS 10142-1 and 10142-1-2: The wiring of premises (as amended and published)
4. SANS 474 / NRS 057 : Code of Practice for Electricity Metering
5. Municipal Electricity Supply by-law

3.6. Testing of Inverters

Until such time as a SABS mark is issued for inverters, the Municipality shall require proof in the form of test certificates, of type tests having been successfully carried out by a third party testing authority certifying compliance of the inverters with NRS097-2-1 (and NRS097-2-2 when published). The use of inverters without such certification is not permitted, both in new and existing installations. The installation of reverse feed blocking does not exempt the customer from providing the NRS097-2-1 certification.

In general, the test certificate must be for the most recent version of NRS097-2-1. The municipality reserves the right not to accept test certificates for old versions of NRS097-2-1.

The certification body must be SANAS accredited or be recognised by the International Laboratory Accreditation Co-operation (ILAC) or the International Accreditation Forum (IAF) in terms of ISO/IEC 17025:2005 for photovoltaic systems. The accreditation bodies must provide accreditation documentation for the specific test location.

The customer should require the inverter supplier to provide the necessary certification before the equipment is purchased.

3.7. Islanding / Anti-Islanding installations

All SSEG installations are required to have an anti-islanding function (immediate disconnection when there is a general power outage) as stipulated in the NRS 097-2-1. Certification to this effect is required of inverters (see 3.4 Testing of Inverters).

Should the inverter or SSEG installation have the facility to both comply with the NRS 097-2-1 requirements for grid-connected systems (including anti-islanding requirements) AND operate in "islanded mode" (or "off grid" mode) where the SSEG installation supplies power to a portion of the customer's electrical grid during a general power outage, the islanded system shall be effectively isolated from the municipal electrical network during islanded mode operation.

If the SSEG installation is to be configured as a standby supply after isolating from the municipal electrical network (in which case it becomes an 'alternative supply', not an embedded generator any longer) using a break-before-make changeover switch, a registered person in terms of the Electrical Installation Regulations (2009) shall issue a Certificate of Compliance to the owner if the generator is to be connected to the existing internal wiring of the property. Requirements of SANS 10142-1 apply.

3.8. Battery or other Storage

Battery or other storage may be included in the SSEG configuration. Where it is connected in standby power supply mode (i.e. it is not configured to provide power in parallel to the SSEG but only to operate in islanded mode) the provisions for 'island mode' generators in Section 3.5 Islanding / Anti-Islanding installations apply.

Where storage is connected such that it can provide power onto the network, it shall do so via an NRS097-2-1 certified inverter. If this is achieved via a separate storage/battery inverter (even only to feed into the customers wiring which is in turn connected to the municipal network), the storage/battery inverter shall be NRS097-2-1 certified, and evidence of such compliance provided to the municipality.

Battery charging limits: Note that the municipality reserves the right to restrict the permissible maximum battery charging current should it become evident that there are associated existing or potential adverse impacts on the grid due to battery charging demand. In this event all SSEG customers – new and existing - will be required to comply with such limits at their own cost. The municipality therefore advises that installed systems include a mechanism for such limitation should it become necessary.

3.9. Hybrid inverters operating in islanded (off-grid) mode

Inverters which can be operated in grid-tied or islanded (off-grid) mode, but where physical wiring connections with the grid exist (e.g. via the distribution board), are considered grid-tied SSEG systems and require municipal permission as described in this document. This applies even if they are being operated in off-grid (islanded) mode. Only where there is no physical wiring connection to the grid, direct or indirect, is it not considered an embedded generator.

3.10. Fire safety and emergency shut-off switch

Emergency disconnection switching shall be in accordance with NRS 097-2-1.

3.11. Dead Grid safety Lock

Dead Grid Safety Lock shall be in accordance with SANS10142-1-2 (as published).

3.12. Qualified installers

The municipality recommends that customers installing solar PV SSEG use installation electricians registered with department of Labour and/or with industry accredited installers under a third party quality assurance such as PV Green Card: A SAPVIA (South African Photovoltaic Industries Association) endorsed programme to ensure the quality and safety of PV installations (www.pvgreencard.co.za), or P4 quality assurance certification (<https://pqrs.co.za/the-pv-quality-assurance-program/>).

3.13. SSEG Sign-off on Commissioning

Until SANS 10142-1-2 'The wiring of premises; Specific requirements for embedded generation installations connected to the low voltage distribution Network in South Africa' is published, upon commissioning, all SSEGs shall be signed off by:

ECSA registered Pr Eng or Pr Tech Eng AND a registered Installation electrician

Upon the publishing and implementation of the SANS10142-1-2, a registered person in terms of the Electrical Installation Regulations (1993) with appropriate knowledge and experience in applying the SANS10142-1-2 (acceptable to the Municipality) will be adequate to sign-off all SSEGs.

3.14. Decommission of SSEG system

The Municipality requires notice of any SSEG installation which has been decommissioned. The SSEG installation must, at the owners' cost, be disconnected from the municipal electrical network by the removal of the wiring that connects the SSEG with the municipal electrical network and a decommissioning report filed (on the prescribed form) – including the provision of a Certificate of Compliance to confirm disconnection.

3.15. Eskom grid connection

Customers residing within the municipal boundaries, but located in Eskom's area of supply, need to apply to Eskom for consent to connect the SSEG installation to the Eskom electrical grid. The municipality will not be involved in this process.

3.16. SSEG applications from sub-tenants, complex residents or other non-municipal customers

The municipality will only engage with applications from their existing or new customers. Where an SSEG installation is intended but the person purchases electricity from a re-seller (e.g. landlord/lady, complex body corporate), for example, not directly from the municipality, the application will need to come from the re-seller who is a municipal electricity customer.

3.17. Off-grid system

Stand-alone generators (not connected to the municipal electrical network need permission from the Municipal Electricity authority). Approvals from other Departments may still be necessary (e.g. Building Dept), and it is the responsibility of the owner to comply with any such requirements.

3.18. Advice for the customer

3.18.1. Load profile management to maximise benefit to the customer

Customers will generally find it most financially beneficial to ensure that they utilise as much of the generated electricity as they can and avoid or minimise export/reverse power flow. With solar PV SSEG, for example, with a residential SSEG installation, loads such as geysers and pool pumps could be

shifted to the middle of the day when solar generation is typically at its highest – between mid-morning and mid-afternoon.

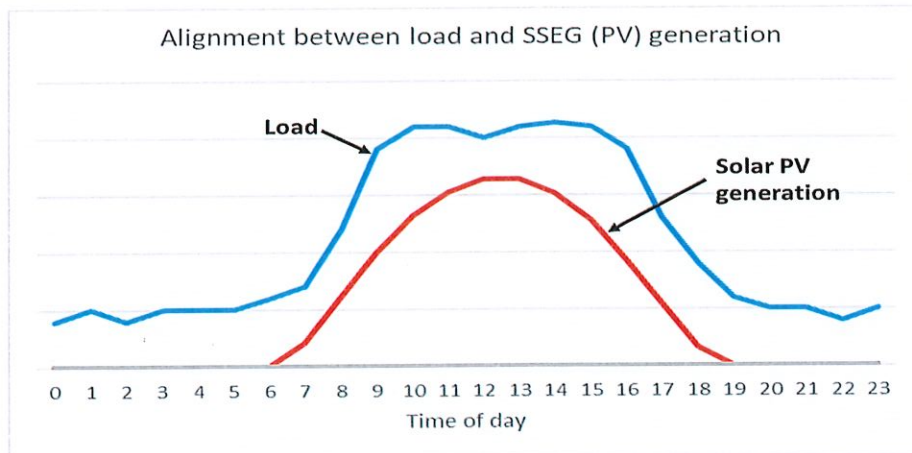


Figure 1: Good alignment between load profile and SSEG (PV) generation

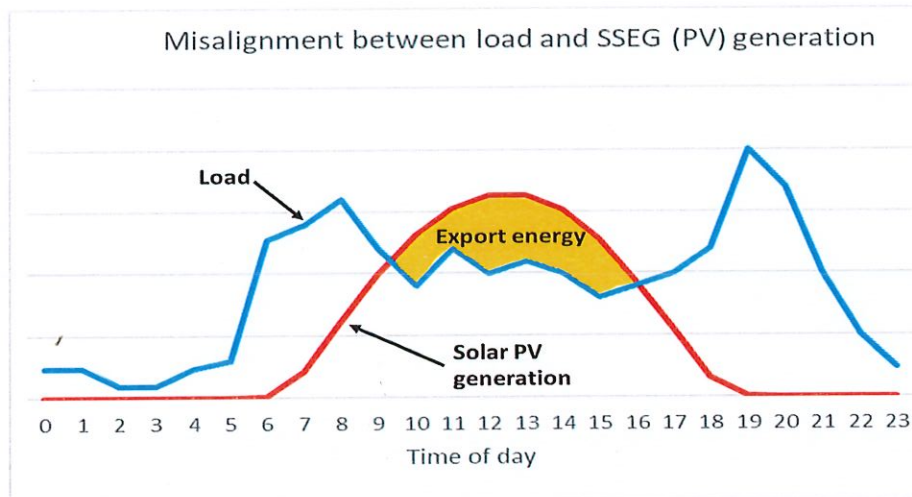


Figure 2: Poor alignment between load profile and SSEG (PV) generation).


3.18.2. Roof strength for PV installations

Customers are responsible to ensure that their installer has checked the load (weight) bearing capacity of the roof on which the PV panel installation is to take place. In some cases, this may involve obtaining an engineer's report on the roof strength. Note that in normal circumstances roof design strength is adequate to accommodate PV panels.

3.18.3. Installer experience and accreditation

Customers are advised to check that the installer they intend to use has adequate competence and experience to undertake such projects. For solar PV SSEG third party quality assurances such as PV Green Card or P4 can also serve as experience:

- PV Green Card: A SAPVIA (South African Photovoltaic Industries Association) endorsed programme to ensure the quality and safety of PV installations (www.pvgreencard.co.za).
- P4 quality assurance certification (<https://pqrs.co.za/the-pv-quality-assurance-program/>).

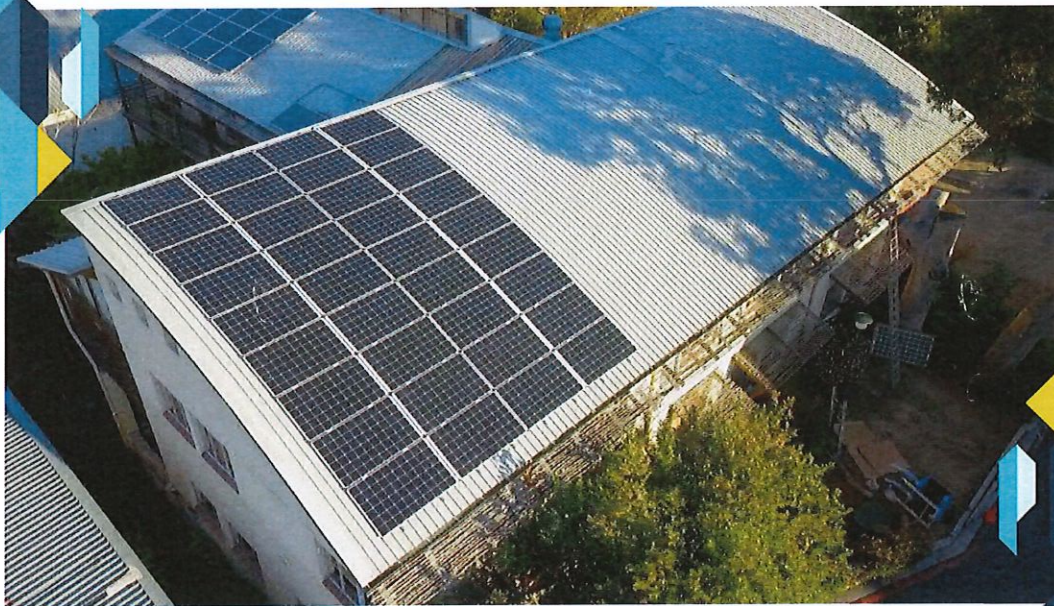

4. Metering

4.1. Metering installation and reverse power flow/ feed-in to the municipal electrical network

All customers installing SSEG, whether with reverse feed blocking or not, shall have an approved bi-directional meter. The Municipality shall provide and install the requisite meter at the customer's cost.

Where the municipality has not yet implemented approved and activated EG tariffs, reversed feed will be allowed on systems so enabled, but will not be compensated for (note that this is a temporary situation pending the operationalising of SSEG tariffs).

Conventional credit or prepayment meters are not allowed to run backwards.

4.2. Adaption of electrical metering installation

The Municipality reserves the right to require customers moving onto an SSEG tariff to adapt their electrical installations in such a way that the metering is located in a kiosk in the road reserve. The municipality will inform prospective SSEG customers accordingly should this be required.

4.3. Refunds of electricity already pre-purchased

Where applicants currently have Prepayment meters (PPM), these will need to be replaced with meters appropriate for SSEG systems and tariffs. Refund of Prepayment meter units when a customer changes to the SSEG tariff and has an appropriate meter installed will not be given. The customer should therefore delay the installation of an SSEG-appropriate meter until the units purchased are used. Otherwise units purchased on the PPM will be forfeited.

5. SSEG connection criteria

Simplified SSEG connection criteria are specified in the NRS 097-2-3, and applications for systems that fall within these parameters are likely to be easily processed by the Municipality, and only in rare cases will require grid impact studies in their assessment. Such parameters include:

- Systems not larger than 350kVA
- Connecting to a LV network

Applications to connect SSEG installations which exceed the parameters of the NRS097-2-3 but do not exceed 1MVA will also be accepted by the Municipality, but may require specialist grid-impact studies in their assessment. The Municipality will advise the customer of such needs after the application form is received.

There are different criteria for simplified connection in shared and dedicated LV feeders, as described below (for details see the relevant sections of the NRS097-2-3):

Note that the below is a summary of parts of the NRS097-2-3 (2014), and is provided for information purposes. The parameters and criteria in the latest version of the NRS097-2-3 may differ from the below and, where this is the case, they supersede the below information. It is therefore important to consult the latest version of the NRS097-2-3 as the criteria therein will be used to assess the SSEG application.

5.1. Shared LV feeders

The NRS 097-2-3 specifies that the maximum individual generation limit on a shared LV feeder (which applies to most small commercial and residential situations) shall not exceed 25% of the consumer's NMD, and be up to a maximum of 20kVA. The following SSEG size limitations are derived from NRS 097-2-3 for Shared LV connections.

Table 3: SSEG size limitations - NRS 097-2-3 for Shared LV connections

Service connection		Maximum Demand (kVA)	Maximum Total Generation Capacity of SSEG (kVA)
No. of Phases	Service Circuit Breaker Size (A) per phase		
1	40	9.2	2.3
1	60	13.8	3.5
1	80	18.4	4.6
3	40	27.7	6.9
3	60	41.6	10.4
3	80	55.4	13.8
3	100	69.3	17.3

Notes to table:

- To determine if you have a single-phase or three-phase connection, check the main circuit-breaker on the distribution board. A single-phase supply will generally have a single main circuit-breaker, and a three-phase a triple main circuit-breaker. If in doubt consult an electrician.

- **'Maximum total generation capacity'** refers to the total output capacity of the generator. For PV systems in particular, this refers to the maximum output of the inverter. Due to system losses this is typically 10 to 20% lower than the maximum output of the PV panels, which is specified in DC kilo-Watt-peak (kWp). The system designer/installer will provide guidance here.

5.2. Phase balancing

If SSEG generation capacity is 4.6 kVA or less, a single-phase inverter can be installed even if the customer has a three-phase connection. Systems above 4.6 kVA are required to be balanced across the phases.

5.3. Dedicated LV feeders

On dedicated LV feeders the maximum generator size is limited to 75% of the NMD.

5.4. Cumulative SSEG capacity and impact on LV and MV networks

Should the cumulative installed capacity of an SSEG installation be such that it may impact negatively on local LV or MV network functioning, as per the stipulations of NRS097-2-3, the municipality will not allow further SSEG connections until they can be demonstrated to be undertaken without such negative impact. Increasing the SSEG carrying capacity on feeders may require network hardware upgrades. Specialist grid impact studies may be requested of the new SSEG applicant to demonstrate the impact, even if the individual system size falls within the NRS097-2-3 parameters.

5.5. Grid impact studies

Should the SSEG being applied for cause the parameters in the NRS097-2-3 (Simplified Connection Criteria) to be exceeded, either (1) the system should be modified to fall within these parameters, or (2) a Grid Impact Study is likely to be requested by the municipality before the application can be assessed. Content and coverage of such a study may vary depending on the circumstance.

Should such impact studies be required by the municipality, details of method, data and payment requirements should be discussed with the municipality. Responsibilities of the municipality (who has the network data) and the customer in completing the study will also need to be clarified. Even in the case of SSEG with no reverse feed, scenarios such as Load Rejection may still need to be assessed in the study.

Where network hardware upgrades are found to be necessary in order to accommodate the proposed SSEG, costs may be for the customer's account. This should be discussed with the municipality.

Further information on Grid Impact Studies is given in Annex A.

6. SSEG Tariffs

The Municipal SSEG tariffs, once approved by NERSA, will be available on the municipal website or from the electricity department offices on request. Tariffs are updated annually. Where NERSA approved SSEG tariffs have not yet been implemented by the municipality, reverse feed will be accepted but will not be compensated for (note that this is a temporary situation pending the operationalising of SSEG tariffs).

General information on SSEG tariffs is given below:

6.1. Residential SSEG Tariff

The Residential SSEG tariff comprises the following parts:

Fixed charge: This comprises (1) a Network charge, which ensures that fixed costs associated with maintaining and operating the municipal electrical network are recovered through appropriate charges, and (2) a Service charge that covers the fixed costs associated with providing a retail service network (metering, billing, customer call centre) are recovered through appropriate service charges.

Energy charge (c/kWh): The variable cost associated with the volume of energy consumed is recovered through appropriate charges. This is billed on a per kWh basis and may be simple (Flat or Inclining Block tariff) or complex (Time of Use or other tariff).

Export (Feed-in) credit (c/kWh): The compensation to the customer for energy provided back onto the network.

6.2. Commercial and Industrial SSEG Tariff

Commercial and industrial customers that are on tariffs which already have a fixed service charge and network demand charge will retain a similar tariff structure, and an export (feed-in) generation tariff credit will be added for reimbursement for energy exported onto the municipal electrical network. Customers on a tariff that does not include fixed service/network charge and demand charge will be changed to an appropriate tariff.

Commercial and Industrial customers should note that the demand charge component of the tariff is unlikely to change after the installation of the SSEG because the monthly maximum demand is unlikely to reduce due to the regular occurrence of cloudy weather.

6.3. Billing Period

The service charge along with charges for consumption and credits for feed-in will be billed monthly. Any credits from excess SSEG generation in a particular month will be rolled over to the following month. Credits will not be paid out to the customer.

6.4. Connection Costs

The Municipality may stipulate a connection cost to be paid by SSEG customers prior to system generation approval. This will be reflected in the currently applicable tariff and charge schedule.

6.5. Increased Costs

The Municipality bears no responsibility should the customer's electricity bill increase due to changes in the applicable tariff. It is up to the customer to ensure that they understand the financial implications of having an SSEG installation installed and the applicable tariffs.

6.6. Time-of-Use Tariffs

Time of Use tariffs are considered best practice for both consumption and export (feed-in) tariffs, and municipalities may increasingly move all customers to such tariffs in future.

7. Approvals required from other municipal departments

Where relevant, approvals required of other municipal departments are to be obtained prior to submission of the SSEG application form, and reflected on the form.

7.1. Buildings/Planning department

No building plans are required to be submitted provided the SSEG installation does not project more than 1.5 m, measured perpendicularly, above the roof and/or not more than 600mm above the highest point of the roof. If the above parameters are exceeded then full building plans, including an engineer's endorsement, are required. A relaxation in terms of the Zoning Scheme Regulations may also be required under either one or both of the above circumstances.

Ground-mounted systems: no building plans are required to be submitted provided the panel(s) in its installed position does not project more than 2.1 metres above the natural/finished ground level. Full building plans are required where any part of the installation projects more than 2.1 metres above the ground level.

7.2. Other Approvals

SSEG installations covered by this document do not require Environmental Impact Assessments¹. For generators that produce noise or air pollutants (e.g. diesel generators), approval from Municipal departments is required (e.g. Health, Environment).

8. What payments may be due by the customer?

The customer is responsible to pay for the following:

- The supply and installation of meters (in accordance with the Municipality's metering policy)
- Connection charges (if applicable)
- Specialist municipal electrical network impact studies - if required (details of payment amounts are to be discussed with the municipality)
- Any changes required to the municipal electrical network upstream of the connection point as a result of the SSEG installation.
- Specialist test that are required, e.g. Inverter testing
- Any other costs associated with obtaining approval for the SSEG connection to the municipal grid

9. SSEG application process

The *Application for the Connection of Embedded Generation* form shall be completed for all applications to connect an SSEG installation to the municipal electrical network. The forms are available on the Municipality's website or from the electricity department offices.

▪ Step 1: Obtain the Application Form

- Visit the Municipality's website and download the relevant application form/s or request the forms from the electricity department offices.

▪ Step 2: Complete application form for the connection of SSEG

¹ Large-scale embedded generation installations would require environmental authorisation (EA) in terms of the NEMA 2010 EIA Regulations if they generate > 10 MW electricity. In addition the electrical transmission infrastructure that may be associated with a large scale embedded generation system would also require EA if it has a capacity of 275 kV or more within an urban area, or more than 33kV outside urban areas.

- The Municipality requires that the application form/s be signed by the current electricity customer/account holder.
- Details of the proposed installer shall also be provided.
- The customer may need support from the proposed installer or registered personnel in completing the application form.
- By signing the application form the customer agrees to the *General Terms and Conditions: Contract for Connection of an Embedded Generator* (this document is available on the municipal website or on request from the electricity department offices).

▪ **Step 3: Obtain permission from other Municipality departments**

- The electricity department may require prior approval of the proposed SSEG installation from other departments as stipulated in the form (e.g. buildings department) if relevant. All relevant approvals must be reflected in or submitted with the application form.

▪ **Step 4: Submit completed application form/s and attachments**

- Form/s shall be submitted to the relevant contacts at the electricity department.
- Attachments to the application include an initial design circuit diagram (for >100kVA systems) and the inverter certification of compliance with NRS 097-2-1.

▪ **Step 5: Installation commencement upon approval from the municipality**

- After due consideration of the application, the applicant will be informed in writing whether the application has been successful or not.
- If further information or grid studies are required by the municipality, the applicant will be notified thereof.
- Once notified in writing of a successful application, the applicant may commence installation (it is advised that the applicant does not pay for any equipment until municipal approval to install is granted in writing, as such approval is not guaranteed).

▪ **Step 6: Commissioning and documentation to be submitted to the electricity department.**

- Once installation is complete, commissioning of the SSEG installation shall be undertaken by a competent person, who shall complete and sign off the SSEG Installation Commissioning Report.
- In addition to the SEG Installation Commissioning Report, there is a list of other documentation specified on the Commissioning Report for submission with the Report, including:
 - Final as-built circuit diagram
 - Inverter type test certificate according to NRS 097-2-1.
 - An electrical installation Certificate of Compliance as per SANS 10142-1 (and SANS 10142-1-2 when published).
- All completed documentation shall be submitted to the relevant electricity department office.

- **Step 7: Inspection of installation if necessary**

- The Municipality shall inspect the SSEG installation if they deem it necessary, although this is unlikely in the case of a residential application.

- **Step 8: Approval granted to connect to the municipal electrical network and generation commences**

- If all of the above is satisfactory, the Municipality shall install the necessary meter, or check that such is installed.
- Approval to connect the SSEG installation to the municipal electrical network shall be provided by the electricity department to the customer, in writing, together with any operation and other requirements deemed necessary.
- Once this is done, the change to the SSEG tariff shall be implemented if applicable.

10. Changes to existing approved systems

SSEG installations that have previously been approved by the municipality but where changes to the SSEG are planned, will require the following:

A new application shall be completed when the following is intended:

- An expansion in the SSEG capacity
- A change in the SSEG configuration (e.g. adding storage with synchronisation capabilities in parallel to the existing SSEG)

A new commissioning process needs to be undertaken, and a new Commissioning Report completed, when the following changes are made:

- Significant components are replaced (i.e. inverter, anti-island device, dead grid safety lock, other protection equipment) but system capacity is not increased
 - A system is moved but no changes to capacity or significant components are made (i.e. inverter, anti-island device, dead grid safety lock, and other protection equipment all stay the same)
-

11. ANNEX A: Grid Impact Study Overview

In cases where an SSEG or larger EG application falls outside the simplified connection criteria in NRS097-2-3, it may be necessary to conduct grid impact studies. These studies will assess whether the grid or electrical network remains within prescribed technical limits² after the connection of the SSEG. The municipality will provide specific requirements in this regard. Some general information is below.

○ General grid impact studies

For most SSEG systems connecting to LV networks grid impact studies can be relatively simply undertaken – often with only hand calculations - and do not require detailed grid simulation. They can thus be undertaken without power system simulation software. More detailed guidelines on assessing such impacts can be found in [Recommended practice for assessing the connection of small generators based on renewable energy sources to low-voltage and medium-voltage municipal grids](#) (Moeller & Poeller Engineering, May 2018 – Final Draft).

○ Requirements for more complex Grid Impact Studies


Where more complicated grid impact studies are required, power system simulation may need to be undertaken using appropriate software.

The municipality will be required to utilise their geographic and operational knowledge of the network to determine the areas that could potentially be affected by the SSEG. In order to conduct the studies, the municipality will need to have a representative model of the network affected in the format required by the simulation software tool.

Table 4: Grid impact studies to be conducted

Type of study	Notes
Loadflow • Voltage limits (regulation) • Thermal loadings	To be undertaken for: - Peak load, max gen - Light load, max gen - Peak load, min gen - Light load, min gen
Voltage changes • Generator rejection (combined impact of all embedded generation on that part of the network)	To be undertaken for: - Peak load, max gen - Light load, max gen
Short circuit studies • Equipment ratings	
Protection coordination	

² As a minimum these limits should be in line with the South African Grid Code (SAGC), Distribution Code and the SAGC Requirements for Renewable Power Plants

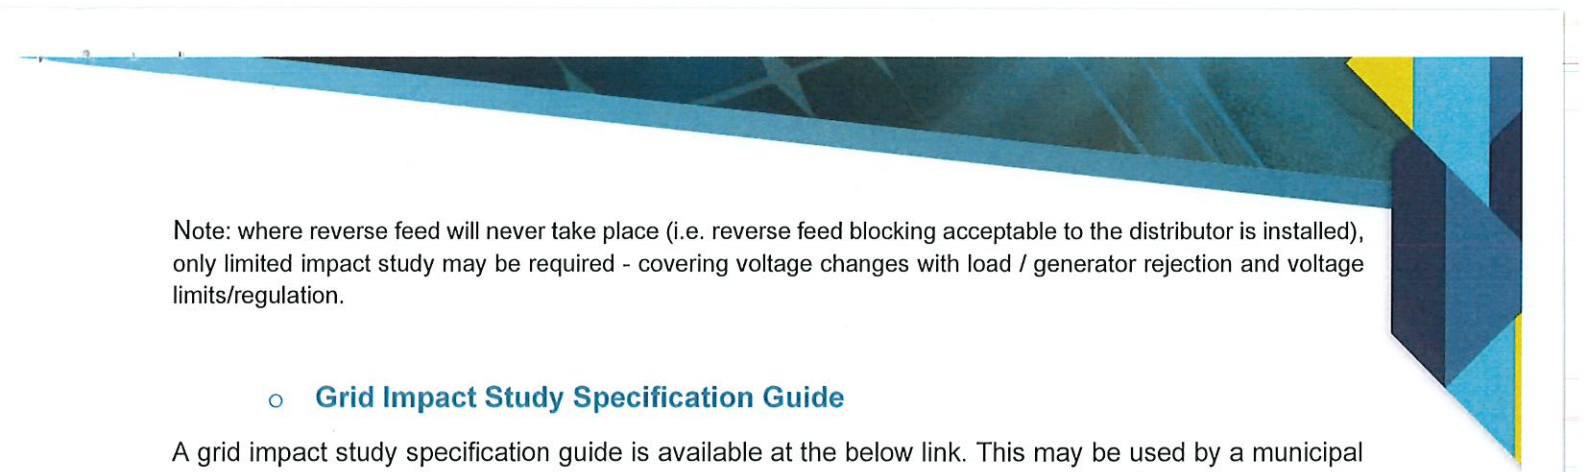

Note: where reverse feed will never take place (i.e. reverse feed blocking acceptable to the distributor is installed), only limited impact study may be required - covering voltage changes with load / generator rejection and voltage limits/regulation.

- **Grid Impact Study Specification Guide**

A grid impact study specification guide is available at the below link. This may be used by a municipal distributor to specify exactly what is required in such a study. It provides a checklist of parameters to be examined as well as description of the data needs for a simulation study.

<https://www.sseg.org.za/grid-impact-study-specification-guide/>

12. ANNEX B: New Owner/Account Holder Declaration

In the event of transfer of property and/or ownership, the below Declaration is to be signed by new owner / account holder:

Declaration regarding the SSEG system located at:			
Property Erf number:			
Physical address:			
Township / Suburb / Farm		Post code:	
Site GPS coordinates:	Latitude (dd mm ss)		
	Longitude (dd mm ss)		
Name of owner/account holder:			
Electricity Account Number:			
Telephone Number:	Land:		
	Mobile:		
Email Address:			
Acceptance of Terms and Conditions <i>I, the Customer (Account Holder) acknowledge that I have read and understood the General Terms and Conditions: Contract for Connection of Embedded Generator and that by signing this declaration form, I agree to be bound by the General Terms and Conditions: Contract for Connection of Embedded Generator. I note that a copy of the General Terms and Conditions: Contract for Connection of Embedded Generator can be found on the Municipal website or is obtainable from the electricity department offices on request. Any amended terms and conditions found on the aforementioned website will form part of the terms and conditions of the General Terms and Conditions: Contract for Connection of Embedded Generator, to which terms I, the Customer, agree to be bound. The information provided in the SSEG Application Form accepted by the Municipality also forms part of the General Terms and Conditions: Contract for Connection of Embedded Generator.</i>			
Customer (Account Holder) Signoff:			
Name Date Signature			

The declaration must be submitted to the electricity department.

APPLICATION FOR THE CONNECTION OF EMBEDDED GENERATION



General information

This application form is for the connection embedded generation to the electricity network of Bela-Bela Local Municipality. The *Requirements for Embedded Generation* document of the municipality provides important background regarding the municipality's conditions for generators.

This application form is for:

- All generator power sources (solar, wind, hydro, diesel etc)
- Embedded generators up to 1MVA
- Generators with self-consumption
- All customer categories (residential, commercial etc)

This application form is NOT for:

- Generators >1MVA
- 'Pure' generators / IPPs (no self-consumption)
- Generators wanting to wheel power
- Generators in Eskom network areas
- Off-grid generators

Applications that fall within the 'Simplified Connection Criteria' as specified in the NRS097-2-3 are likely to be approved by the municipality. Applicants should familiarise themselves with these criteria to avoid delays (refer to the municipality's 'Requirements' document). Systems that exceed these criteria, including those between 350kVA and 1MVA, may require grid impact studies before their approval is considered. The municipality will advise if such studies are required after this application form is submitted. For systems not covered by this form, engage with the Municipality separately for more information. In addition, some systems need to be registered with NERSA (refer to the Requirements document).

It is recommended that this form is filled in by personnel familiar with the technical details of the intended generation technology. 'Competent person' sign-off of the Commissioning Report is mandatory, but such sign-off is not required at the Application stage.

If the applicant does not yet have an electricity connection, an application for a new connection will need to be submitted together with this application form.

PLEASE NOTE: FAILURE TO PROVIDE ALL RELEVANT INFORMATION AS REQUIRED BELOW
MAY LEAD TO DELAYS IN THE APPLICATION PROCESS

Project Name:			
Nominal AC capacity of generator (kVA):			
System type:	Solar PV:	Other generator (specify):	
If solar PV (tick):	Rooftop	Ground mounted	Building integrated

SECTION A: APPLICANT, PROPERTY AND INSTALLER INFORMATION

Property ERF No:			
Physical address:			
	Postal code:		

Site GPS coordinates	Latitude (dd mm ss)	S			°			'			''
	Longitude (dd mm ss)	E			°			'			''

Account Holder/Customer Details*

Name:			
Electricity Account No:			
Telephone Number:	Landline:	Mobile:	
Email Address:			

* - if the applicant does not yet have an electricity connection, this should be stated above and an application for a new connection will need to be submitted together with this application form.

Installer Details

Company Name:			
List any professional memberships, certifications etc. (incl. reg number):			
Physical address:			
	Postal code:		
Postal address:			
	Postal code:		
Website:			
Contact Person:			

Telephone Number:	Landline:	Mobile:
Email Address:		

Construction Schedule*

Anticipated Construction Start Date:		Anticipated Commissioning Date:	
---	--	------------------------------------	--

• - if system already installed (i.e. a retrospective application) – state 'existing system' under start date

Existing Connection

Existing main switch:	Current (A):		Phases (tick):	Single	Three	
NMD (kVA) (non-residential):						
Customer supply voltage (tick):	LV (230 or 400V):		MV:		Other:	

SECTION B: EMBEDDED GENERATOR TECHNICAL INFORMATION

Embedded Generator (EG) System Details

Total AC capacity of EG (kVA and PF) (inverter capacity if solar PV):	kVA ¹ :	If solar PV: Total PV panel (nameplate) capacity (kWp):	
	PF ² :		
Type of energy conversion ³ :			
Manufacturer (if PV, fill in for inverter):			
Model (if PV, fill in for inverter):			Quantity:
Number of Phases ⁴ (tick):	Single Phase	☐	Three Phase ☐
Voltage of generator connection into customer's network:			
Earthing arrangements i.e. TN-C-S:			
Grid Connection mode (tick appropriate):	☐ Energy from generator to be used within consumers electricity network and excess power to be exported to Municipal electricity network		

¹ Note that if storage is included in the EG configuration and is set up in such a way that it can contribute additional export onto the grid, such output must be included in this figure.

² This will mainly apply to systems that make use of rotating machines and/or transformer type power converters e.g. wind power, hydro, battery connected inverters or diesel generators. For transformer-less static power converters (e.g. inverters with a solar PV system), the power factor is generally unity and the kW of the system will be the same as the kVA.

³ e.g. synchronous generator, induction generator, static inverter, fuel-cell, dyno set. Will typically be an inverter for residential SSEGs.

⁴ see NRS097-2-3 for phase balancing requirements

Embedded Generator (EG) Protection Details

EITHER: NRS097-2-1 certification must be produced (inverters **must** have such certification)

NRS097-2-1 test certificate is attached to this application (tick) : ☐

OR: fill in the below -

Method of synchronising

(auto/manual, make and type of relay, etc.)

Method of anti-islanding

(details of scheme, relays used, etc.)

Method of generator control

(AVR, speed, power, PF, excitation system requirements etc. relays to be used)

Other main protection to be applied

(O/C, E/F, over/under voltage, over/under frequency, reverse power flow, back-up impedance, generator transformer back-up earth fault, HV breaker fail, HV breaker pole disagreement, etc.)

Storage (e.g battery)

Does the EG include storage capabilities? (tick appropriate): ☒

No storage ☐

Yes (*but only as standby power – cannot operate in parallel and feed onto the grid*) ☐

Yes (*connected in parallel to EG – can feed onto the grid*) ☐

Storage capacity (kWh):

If connected in parallel - Specify anti-islanding arrangements (e.g. NRS097-2-1 certificate)⁵:

Preliminary design details (for systems >100kVA only):

Attach a preliminary circuit diagram and design showing major components, proposed point of common coupling, isolating and interfacing devices with the municipal electrical network, protection schemes, customer electrical installation, earthing arrangements, etc.

⁵ See 'Requirements' document for anti-islanding requirements regarding storage
BBLM Embedded Generation Application Form **5**



Estimated Consumption and Generation Levels

Current electricity consumption/month (average kWh/mth)	
Estimated average output of generator/month (average kWh/mth)	

SECTION C: REGULATORY REQUIREMENTS AND STANDARDS

List of regulatory approvals, requirements and references that the installation will comply with:

(note that the latest version of all of the below standards are applicable)

✓

NRS 097-2 : Grid interconnection of embedded generation: Part 2: Small scale embedded generation (NRS097-2-1 and NRS097-2-3)	
SANS 10142-1 and SANS 10142-1-2: The wiring of premises (as amended and published)	

NERSA registration/license

Does the system need to be registered with NERSA? (tick)	Yes		No	
Does the system require a license from NERSA? (tick)	Yes		No	

Clearance by other Municipal departments (only if needed – see 'Requirements' document)

Section	Comments	Name	Signature	Date
Buildings/Planning department				

Notes:

- Electricity department will require **prior** approval from this department if necessary (see 'Requirements' document to determine if necessary). Applications to connect to the municipal electrical grid will not be considered until necessary approval has been obtained.
- Photovoltaic (PV) SSEG applications require approval from Planning and Building Development Management if:
 - Roof top installations: PV panel(s) in its installed position projects more than 1.5m, measured perpendicularly, above the roof and/or projects more than 600mm above the highest point of the roof;
 - Installations on the ground: PV panel(s) in its installed position projects more than 2.1 metres above the natural/finished ground level.

SECTION D: DECLARATION

I request the Municipality to proceed with a preliminary review of this embedded generation interconnection application and I agree to pay the cost associated with completing this review and obtaining written consent of the Municipality, though such costs are unlikely except if grid studies are required. Should such grid studies be required, a quotation for such work will be provided beforehand, giving me the opportunity to cancel or modify the application should I wish to do so.

I further consent to the Municipality providing this information to the National Electricity Regulator of SA (NERSA) and other Distributors as required.

I declare that this installation has been designed such that it complies with the requirements laid out in the latest version of the Municipality's *Requirements for Embedded Generation* document. I agree not to interconnect and operate this proposed SSEG system without written approval from the Municipality to do this.

Acceptance of Terms and Conditions

I, the Customer (Account Holder), acknowledge that I have read and understood the General Terms and Conditions: Contract for Connection of Embedded Generator and that by signing this application form, I agree to be bound by the General Terms and Conditions: Contract for Connection of Embedded Generator, should approval for the Embedded Generator be granted by the municipality. A copy of the General Terms and Conditions: Contract for Connection of Embedded Generator can be found on the Municipal website or is obtainable from the Electricity Department offices on request. Any amended terms and conditions found on the aforementioned website will form part of the terms and conditions of the General Terms and Conditions: Contract for Connection of Embedded Generator, to which terms I, the Customer, agree to be bound. The information provided in this Application Form also will form part of the General Terms and Conditions: Contract for Connection of Embedded Generator.

Customer (Account Holder) Sign-off:

_____	_____	_____
Name	Date	Signature

Installer Sign-off:

_____	_____	_____
Name	Date	Signature

Return completed form to the relevant office, or e-mail address:

Electrical Department

E-mail: kotsokoanet@belabela.gov.za

Number: 082 857 9003

Physical address: Municipal offices, 58 Chris Hani Drive, Bela-Bela

Attachment of this application checklist (tick)

Preliminary circuit diagram (if >100kVA)

Type test Certificate of Compliance and Test Report according to NRS 097-2-1, issued by accredited 3rd party test house (all inverters must have this)